

HIGH-TORQUE
ENGINES RANGE

QuattroT
XS



OUTBOARD
MOTOR



OUTBOARD MOTORS

29 powerful
companions
of navigation

QuattroT
XS

29 models

Power
from **9.9** Hp
to **175** Hp

The XS range of the **Selva** lineup is characterized by high-displacement models that deliver higher torque at lower RPMs. Specifically developed for professional and intensive use, they stand out for their reliability and particularly low fuel consumption.



WAHOO	9,9 XS	
AMBERJACK	9,9 XS/9,9 XSR	EFI
<hr/>		
WAHOO	15 XSR	
AMBERJACK	15 XS	EFI / 15 XSR
ARUANA	15 XS	
DORADO	15 XS	EFI
<hr/>		
AMBERJACK	20 XS / 20 XSR	EFI
ARUANA	20 XS	EFI
DORADO	20 XS	EFI
<hr/>		
ARUANA	25 XS	EFI
DORADO	25 XS	EFI
MURENA	25 XS	EFI
<hr/>		
DORADO	30 XS	EFI
SPEARFISH	30 XS	EFI
<hr/>		
DORADO	40 XS	EFI
MURENA	40 XS	EFI
SPEARFISH	40 XS	EFI
SWORDFISH	40 XS	EFI
<hr/>		
SPEARFISH	50 XS	EFI
SPEARFISH	60 XS	EFI
SWORDFISH	80 XS	EFI
<hr/>		
SWORDFISH	100 XS	EFI
KILLER WHALE	100 XS	EFI
SEI WHALE	100 XS	EFI
SEI WHALE	150 XS	EFI
SEI WHALE	175 XS	EFI

p. 5

p. 7

p. 9

p. 11

p. 13

p. 15

p. 17

p. 19



Wahoo

9,9 xs



Amberjack

9,9 xs



Amberjack

9,9 XSR EFI



TECHNICAL CHARACTERISTICS

	WAHOO	AMBERJACK
Power Hp	9,9 XS	9,9 XS / 9,9 XSR EFI
Power Kw	7,3	7,3
Max. R.P.M.	5000/6000	4000/5000
Motor type	4 stroke SOHC	
Swept volume c.c.	362	432
Bore x Stroke (mm)	63 x 58,1	65 x 65,1
N° Cylinders	2 on line	
Induction	1 carburettor	Electronic Injection
Starting	Automatic	
Fuel	Petrol (for specifications see the user manual)	
Fuel tank (L)	Separate 23	
Lubrication	Forced (oil sump)	
Ignition	C.D.I. Micro-computer	
Ignition timing	Electronic	
Starting	Manual or Electric	
Alternator	Standard 12V/120W (regulator optional) on Manual start version Standard 12V/120W with regulator on Electric start version	Standard 12V/190W (regulator optional) on Manual start version Standard 12V/190W with regulator on Electric start version
Cooling	Water cooled with pump-forced circulation	
Exhaust	Underwater through propeller	
Steering system	Bar with twist grip throttle control and steering friction adjustment or remote with remote control box according to version	
Type of remote control box provided (for the version with remote control box)	Single lever with safety switch	
Trim adjustment	Manual (4 pos) with trim for navigation in shallow waters	Manual (4 pos) with trim for navigation in shallow waters or Power Trim Tilt depending on the version
Direction reversal	Mechanical A-F-R	
Transmission Ratio	13/27	
Available shaft versions	C. - L.	
Standard propeller type	3-bladed with built-in spring drive	
Weight basic version (kg.)	51,7	56

Some models may not be available in all countries, or they may have different power, depending on the different national legislative requirements. (For further details consult the current price list).

The data contained in this table are to be considered as approximate and Selva Marine reserves the right to modify the technical characteristics, materials, construction, weights, etc. without any forewarning or obligations.

Wahoo

15 XSR



Amberjack

15 XS



Amberjack

15 XSR EFI



Aruana

15 XS EFI



Dorado

15 XS EFI



TECHNICAL CHARACTERISTICS

	WAHOO	AMBERJACK	ARJANA	DORADO
Power Hp	15 XSR	15 XS / 15 XSR EFI	15 XS EFI	15 XS EFI
Power Kw	11	11	11	11
Max. R.P.M.	5000/6000	4500/5500	3500/4500	3000/4000
Motor type	4 stroke SOHC			
Swept volume c.c.	362	432	747	996
Bore x Stroke (mm)	63 x 58.1	65 x 65.1	65x75	
N° Cylinders	2 on line		3 on line	4 on line
Induction	1 carburettor	Electronic Injection		
Starting	Automatic			
Fuel	Petrol (for specifications see the user manual)			
Fuel tank (L)	Separate 23			
Lubrication	Forced (oil sump)			
Ignition	C.D.I. Micro-computer		T.C.I./Computer	
Ignition timing	Electronic			
Starting	Manual or Electric		Electric	
Alternator	Standard 12V/120W (regulator optional) on Manual start version Standard 12V/120W with regu- lator on Electric start version	Standard 12V/190W (regulator optional) on Manual start version Standard 12V/190W with regu- lator on Electric start version	Standard 12V / 190W with regulator	Standard 12V / 200W with regulator
Cooling	Water cooled with pump-forced circulation			
Exhaust	Underwater through propeller			
Steering system	Bar with twist grip throttle control and steering friction adjustment or remote with remote control box according to version			Remote with remote control box
Type of remote control box provided (for the version with remote control box)	Single lever with safety switch			
Trim adjustment	Manual (4 pos) with trim for navigation in shallow waters	Manual (4 pos) with trim for navigation in shallow waters or Power Trim/Tilt depending on the version	Power trim with hydraulic damper or Power Trim/Tilt depending on the version	Power Trim/Tilt
Direction reversal	Mechanical A-F-R			
Transmission Ratio	13/27		13/26	13/24
Available shaft versions	C. - L		L	
Standard propeller type	3-bladed with built-in spring drive			
Weight basic version (kg.)	51.7	56	99	111

Some models may not be available in all countries, or they may have different power, depending on the different national legislative requirements. (For further details consult the current price list).

The data contained in this table are to be considered as approximate and **Selva Marine** reserves the right to modify the technical characteristics, materials, construction, weights, etc. without any forewarning or obligations.

Amberjack

20 XS



Amberjack

20 XSR EFI



Aruana

20 XS EFI



Dorado

20 XS EFI



TECHNICAL CHARACTERISTICS

	AMBERJACK	ARJANA	DORADO
<i>Power Hp</i>	20 XS / 20 XSR EFI	20 XS EFI	20 XS EFI
<i>Power Kw</i>	14,7	14,7	14,7
<i>Max. R.P.M.</i>	5000/6000	4500/5500	3500/4500
<i>Motor type</i>	4 stroke SOHC		
<i>Swept volume c.c.</i>	432	747	996
<i>Bore x Stroke (mm)</i>	65 x 65,1	65x75	
<i>N° Cylinders</i>	2 on line	3 on line	4 on line
<i>Induction</i>	Electronic Injection		
<i>Starting</i>	Automatic		
<i>Fuel</i>	Petrol (for specifications see the user manual)		
<i>Fuel tank (L)</i>	Separate 23		
<i>Lubrication</i>	Forced (oil sump)		
<i>Ignition</i>	C.D.I. Micro-computer	T.C.I./Computer	
<i>Ignition timing</i>	Electronic		
<i>Starting</i>	Manual or Electric	Electric	
<i>Alternator</i>	Standard 12V/190W (regulator optional) on Manual start version Standard 12V/190W with regulator on Electric start version	Standard 12V / 190W with regulator	Standard 12V / 200W with regulator
<i>Cooling</i>	Water cooled with pump-forced circulation		
<i>Exhaust</i>	Underwater through propeller		
<i>Steering system</i>	Bar with twist grip throttle control and steering friction adjustment or remote with remote control box, depending on the version	Remote with remote control box	
<i>Type of remote control box provided (for the version with remote control box)</i>	Single lever with safety switch		
<i>Trim adjustment</i>	Manual (4 pos) with trim for navigation in shallow waters or Power Trim Tilt depending on the version	Power trim with hydraulic damper or Power Trim/Tilt depending on the version	Power Trim/Tilt
<i>Direction reversal</i>	Mechanical A-F-R		
<i>Transmission Ratio</i>	13/27	13/26	13/24
<i>Available shaft versions</i>	C. - L	L	
<i>Standard propeller type</i>	3-bladed with built-in spring drive		
<i>Weight basic version (kg.)</i>	56	99	111

Some models may not be available in all countries, or they may have different power, depending on the different national legislative requirements. (For further details consult the current price list).

The data contained in this table are to be considered as approximate and **Selva Marine** reserves the right to modify the technical characteristics, materials, construction, weights, etc. without any forewarning or obligations.

Aruana

25 XS EFI



Dorado

25 XS EFI



Murena

25 XS EFI



TECHNICAL CHARACTERISTICS



	ARJANA	DORADO	MURENA
<i>Power Hp</i>	25 XS EFI	25 XS EFI	25 XS EFI
<i>Power Kw</i>	18.4	18.4	18.4
<i>Max. R.P.M.</i>	4500/5500	4500/5000	4800/5200
<i>Motor type</i>	4 stroke SOHC		4 stroke SOHC - 16V
<i>Swept volume c.c.</i>	747	996	996
<i>Bore x Stroke (mm)</i>	65x75		
<i>N° Cylinders</i>	3 on line	4 on line	
<i>Induction</i>	Electronic Injection		
<i>Starting</i>	Automatic		
<i>Fuel</i>	Petrol (for specifications see the user manual)		
<i>Fuel tank (L)</i>	Separate 23		
<i>Lubrication</i>	Forced (oil sump)		
<i>Ignition</i>	T.C.I./Computer		
<i>Ignition timing</i>	Electronic		
<i>Starting</i>	Electric		
<i>Alternator</i>	Standard 12V / 190W with regulator	Standard 12V / 200W with regulator	
<i>Cooling</i>	Water cooled with pump-forced circulation		
<i>Exhaust</i>	Underwater through propeller		
<i>Steering system</i>	Bar with twist grip throttle control and steering friction adjustment or remote with remote control box, depending on the version	Remote with remote control box	
<i>Type of remote control box provided (for the version with remote control box)</i>	Single lever with safety switch		
<i>Trim adjustment</i>	Power trim with hydraulic damper or Power Trim/Tilt depending on the version	Power Trim/Tilt	
<i>Direction reversal</i>	Mechanical A-F-R		
<i>Transmission Ratio</i>	13/26	13/24	
<i>Available shaft versions</i>	L		L - XL
<i>Standard propeller type</i>	3-bladed with built-in spring drive		
<i>Weight basic version (kg.)</i>	99	111	119

Some models may not be available in all countries, or they may have different power, depending on the different national legislative requirements. (For further details consult the current price list).
The data contained in this table are to be considered as approximate and Selva Marine reserves the right to modify the technical characteristics, materials, construction, weights, etc. without any forewarning or obligations.

Dorado

30 XS EFI



Spearfish

30 XS EFI



TECHNICAL CHARACTERISTICS

	DORADO	SPEARFISH
Power Hp	30 XS EFI	30 XS EFI
Power Kw	22	22
Max. R.P.M.	4500/5000	3500/4500
Motor type	4 stroke SOHC	4 stroke SOHC - 16V
Swept volume c.c.	996	1832
Bore x Stroke (mm)	65x75	81x88,9
N° Cylinders	4 on line	
Induction	Electronic Injection	
Starting	Automatic	
Fuel	Petrol (for specifications see the user manual)	
Fuel tank (L)	Separate 23	Not provided
Lubrication	Forced (oil sump)	
Ignition	T.C.I./Computer	
Ignition timing	Electronic	
Starting	Electric	
Alternator	Standard 12V / 200W with regulator	standard 12V/420W with regulator
Cooling	Water cooled with pump-forced circulation	
Exhaust	Underwater through propeller	
Steering system	Remote with remote control box	
Type of remote control box provided (for the version with remote control box)	Single lever with safety switch	
Trim adjustment	Power Trim/Tilt	
Direction reversal	Mechanical A-F-R	
Transmission Ratio	13/24	13/28
Available shaft versions	L	L - XL
Standard propeller type	3-bladed with built-in spring drive	
Weight basic version (kg.)	111	162

Some models may not be available in all countries, or they may have different power, depending on the different national legislative requirements. (For further details consult the current price list).

The data contained in this table are to be considered as approximate and **Selva Marine** reserves the right to modify the technical characteristics, materials, construction, weights, etc. without any forewarning or obligations.

Dorado

40 XS EFI



Murena

40 XS EFI



Spearfish

40 XS EFI



Swordfish

40 XS EFI



TECHNICAL CHARACTERISTICS

	WAHOO	MURENA	SPEARFISH	SWORDFISH
Power Hp	40 XS EFI	40 XS EFI	40 XS EFI	40 XS EFI
Power Kw	29,4	29,4	29,4	29,4
Max. R.P.M.	5000 - 6000	5300 / 6300	3500/4500	3800/4200
Motor type	4 stroke SOHC	4 stroke SOHC - 16V		4 stroke DOHC - 16V
Swept volume c.c.	996		1832	1832
Bore x Stroke (mm)	65x75		81x88,9	
N° Cylinders	4 on line			
Induction	Electronic Injection			
Starting	Automatic			
Fuel	Petrol (for specifications see the user manual)			
Fuel tank (L)	Separate 23			Not provided
Lubrication	Forced (oil sump)			Forced (oil sump)
Ignition	T.C.I./Computer			
Ignition timing	Electronic			
Starting	Electric			
Alternator	Standard 12V / 200W with regulator		Standard 12V/420W with regulator	
Cooling	Water cooled with pump-forced circulation			
Exhaust	Underwater through propeller			
Steering system	Remote with remote control box			
Type of remote control box provided (for the version with remote control box)	Single lever with safety switch			
Trim adjustment	Power Trim/Tilt			
Direction reversal	Mechanical A-F-R			
Transmission Ratio	13/24		13/28	
Available shaft versions	L			L - XL
Standard propeller type	3-bladed with built-in spring drive			
Weight basic version (kg.)	111	119	162	175

Some models may not be available in all countries, or they may have different power, depending on the different national legislative requirements. (For further details consult the current price list).

The data contained in this table are to be considered as approximate and Selva Marine reserves the right to modify the technical characteristics, materials, construction, weights, etc. without any forewarning or obligations.

Spearfish

50 XS EFI



Spearfish

60 XS EFI



Swordfish

80 XS EFI





TECHNICAL CHARACTERISTICS

	SPEARFISH	SPEARFISH	SWORDFISH
<i>Power Hp</i>	50 XS EFI	60 XS EFI	80 XS EFI
<i>Power Kw</i>	36,8	44	58,8
<i>Max. R.P.M.</i>	4000/5000	4250/5250	5000/6000
<i>Motor type</i>	4 stroke SOHC - 16V	4 stroke SOHC - 16V	4 stroke DOHC - 16V
<i>Swept volume c.c.</i>	1832	1832	1832
<i>Bore x Stroke (mm)</i>	81x88,9		
<i>N° Cylinders</i>	4 on line		
<i>Induction</i>	Electronic Injection		
<i>Starting</i>	Automatic		
<i>Fuel</i>	Petrol (for specifications see the user manual)		
<i>Fuel tank (L)</i>	Not provided		
<i>Lubrication</i>	Forced (oil sump)		
<i>Ignition</i>	T.C.I./Computer		
<i>Ignition timing</i>	Electronic		
<i>Starting</i>	Electric		
<i>Alternator</i>	Standard 12V/420W with regulator		
<i>Cooling</i>	Water cooled with pump-forced circulation		
<i>Exhaust</i>	Underwater through propeller		
<i>Steering system</i>	Remote with remote control box		
<i>Type of remote control box provided (for the version with remote control box)</i>	Single lever with safety switch		
<i>Trim adjustment</i>	Power Trim/Tilt		
<i>Direction reversal</i>	Mechanical A-F-R		
<i>Transmission Ratio</i>	13/28		
<i>Available shaft versions</i>	L - XL		
<i>Standard propeller type</i>	3-bladed with built-in spring drive		
<i>Weight basic version (kg.)</i>	162	162	175

Some models may not be available in all countries, or they may have different power, depending on the different national legislative requirements. (For further details consult the current price list).

The data contained in this table are to be considered as approximate and Selva Marine reserves the right to modify the technical characteristics, materials, construction, weights, etc. without any forewarning or obligations.

Swordfish

100 xs



Killer Whale

100 xs



Sei Whale

100 xs



Sei Whale

150 xs



Sei Whale


175 xs



TECHNICAL CHARACTERISTICS

	SWORDFISH	KILLER WHALE	SEI WHALE	SEI WHALE	SEI WHALE
	100 XS EFI	100 XS EFI	100 XS EFI	150 XS EFI	175 XS EFI
Power Hp	73,6	73,58	73,6	110,3	128,7
Power Kw	5000/6000	4500/5500	4000/5000	5000/6000	5000/6000
Max. R.P.M.	4 stroke DOHC - 16V		4 stroke - 16-valve, DOHC with VCT		
Motor type	1832	2670	2785		
Swept volume c.c.	81 x 88,9	94x96,2	96 x 96,2		
Bore x Stroke (mm)	4 in line				
N° Cylinders	Electronic Injection				
Induction	Automatic				
Starting	Petrol (for specifications see the user manual)				
Fuel	Not provided				
Fuel tank (L)	Forced (oil sump)				
Fuel	T.C.I./Computer				
Lubrication	Electronic				
Ignition	Electric				
Ignition timing	Standard 12V / 420W with regulator		Standard 12V/500W with regulator		
Starting	Water cooled with pump-forced circulation				
Alternator	Underwater through propeller				
Cooling	Remote with remote control box		Remote with Drive By Wire Electronic remote control box		
Exhaust	Single remote control box with safety switch	Single binnacle lever with safety switch	Single top mounted Drive by Wire lever with safety switch		
Steering system	Power Trim/Tilt				
Type of remote control box provided	Mechanical F-N-R		Mechanical A-F-R with electronic Drive by Wire control		
Trim adjustment	13/28	14/28	14/26		
Direction reversal	L - XL			XL	
Transmission Ratio	3-bladed with built-in spring drive				
Available shaft versions	175	216	227		
Standard propeller type					
Weight basic version (kg.)					

Some models may not be available in all countries, or they may have different power, depending on the different national legislative requirements. (For further details consult the current price list).
The data contained in this table are to be considered as approximate and Selva Marine reserves the right to modify the technical characteristics, materials, construction, weights, etc. without any forewarning or obligations.

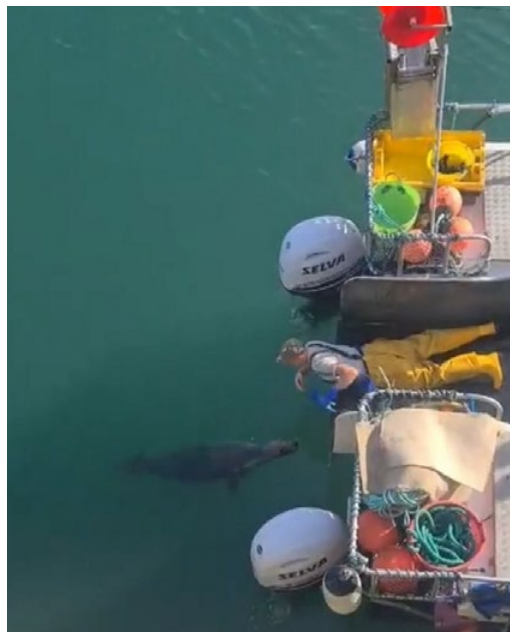

SELVA S.p.A.

Head office and main factory:

Viale dell'Industria, 13

23037 Tirano (SO) - Italia

Tel. 0342 702451 - Fax 0342 70536

VAT Number IT 00050830140

Company Registration SO n. 00050830140

REA n. 18382

www.selvamarine.com



Q8 Oils